



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

A43B 7/08

A1

(11) International Publication Number:

WO 98/47399

(43) International Publication Date:

29 October 1998 (29.10.98)

(21) International Application Number: PCT/IT98/00090

(22) International Filing Date: 17 April 1998 (17.04.98)

(30) Priority Data:

RM97A000226

18 April 1997 (18.04.97)

IT


(71)(72) Applicant and Inventor: SQUADRONI, Onifares, Elpidio
[IT/IT]; Via Vela, 99, I-62012 Civitanova Marche (IT).(74) Agent: SARPI, Maurizio; Studio Ferrario, Via Collina, 36,
I-00187 Roma (IT).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: SHOE SOLE PROVIDED WITH TRANSPIRATION AID AVOIDING THE INLET OF LIQUIDS FROM THE OUTSIDE

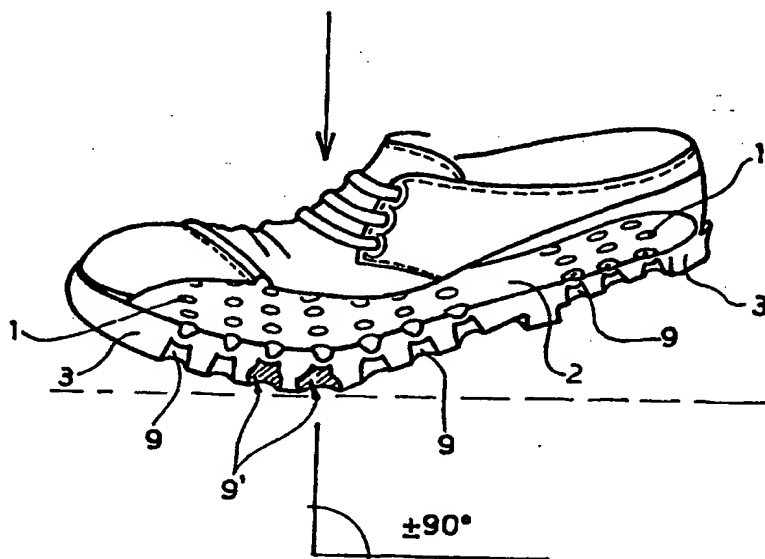

(57) Abstract

A shoe sole provides in the thickness of the sole a plurality of check valves for discharging air inside the shoe which are made of resilient material and are provided each with a microhole connecting the inside of the shoe with the outside, such valves being formed of a membrane provided with a concavity which is directed towards the perforated fixed insole and beneath which a hollow space or chamber is formed which communicates through its lower side with the outside reaching the tread.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Shoe sole provided with transpiration aid avoiding the inlet of liquids from the outside

The present invention relates to a sole for any type of shoes, particularly a sole made, for example, of moulded rubber, characterized in that its construction is such as to guarantee an effective transpiration of the foot and to be impermeable to water and humidity.

Especially in case of shoes provided with a rubber sole it is extremely important to ensure an effective ventilation of the foot in order to avoid that an excessive perspiration causes the sweat to impregnate the fixed insole in contact with the skin of the foot and to produce annoying damages such as reddening of the skin, sores, etc., besides bad smell.

On the other hand many shoes with leather sole are not devoid of such a trouble.

In order to overcome such a problem a number of solutions have been brought forward, among which a recent one has been described in Italian Patent No. 1,232,798, available on the market with the name GEOX (registered trademark). Such a solution provides an osmotic membrane placed in the rubber sole and communicating with the inside of the shoe through holes in the fixed insole and with the outside through holes in the tread. As a result, the sole is made to transpire, though it stays impermeable to humidity.

Although the membrane is protected by suitable layers of inert, transpiring material and it stands the

mechanical stress due to the extension and torsions caused by the movement during walking, such a solution does not provide suitable guarantees of durability for the shoe as it requires strict maintenance conditions which cannot be easily kept up. One example is that the shoe must not be dried by heat sources so as not to damage the membrane.

The present invention seeks to provide a solution to the problem of transpiration, for example, of a rubber sole or a leather sole, keeping the impermeability unchanged without using membranes made of special material and as such needing particular care, but only providing within the width of the sole a plurality of air discharging valves of resilient material provided with microholes establishing a communication between the inside and the outside of the shoe and acting as check valves. Advantageously, in case of rubber soles, such valves are preferably one piece and made in one moulding step along with the sole, and essentially consist of a membrane provided with a cavity directed towards the fixed sole on its upper side and with a hollow space or a chamber which communicates with the tread and then with the outside on its lower side. Such a chamber is capable of protecting the membrane from any type of atmospheric agent.

The microhole of each valve is made in the membrane at the centre of its concavity.

According to another feature of the invention, the microhole is pierced through the membrane during a machining step following the moulding of the sole

which is processed again to mechanically pierce the membrane by needles or stings. It should be appreciated that in such a way the hole pierced through the membrane will never result to be fully regular as it would be the case if the hole was pierced during the moulding step, but it looks much like a tearing so that the membrane can perfectly plug into it.

Such a combination of measures during walking causes the user's weight to increase the air pressure in the chambers so as to oppose to the concavity of the membrane, following the deflection and the resilient deformation of the chambers located in the area in contact with the ground. Thus the hole inside the membrane closes and prevents outside fluids from entering the shoe. On the other hand, when the pressure inside the membrane is greater than the pressure in the outer chamber, the hole inside the concave membrane is opened causing the release of the inner air until the inside pressure coincides with the outside pressure.

Number and distribution of the valves in the sole may obviously be different according to the circumstances. Sometimes only a few valves located in suitable zones of the tread, for example near the heel or in three zones of the foot sole corresponding to toes, arch, and heel, etc. may be provided.

As an alternative, rather than having the valves of resilient material made in one piece with the sole during one moulding step, they may be inserted through

holes made at crucial spots of the sole.

Further advantages and features of the invention will be more readily apparent from the following detailed description with reference to the accompanying drawings which show only by way of a not limiting example some preferred embodiments.

In the drawings:

Fig. 1 shows a perspective view of a shoe during walking with a sole provided with discharge valves according to the present invention, from which the perforated fixed insole has been fully removed and the left side of the vamp has been partially removed in order to show the way the valves are arranged on the upper portion of the sole;

Figs. 2 to 4 show a sectioned view of some embodiments of the discharge valve;

Figs. 5 and 6 show another embodiment which provides a perforated igloo-shaped dome above the discharge valve;

Figs. 7 and 8 show a section view and a plan view, respectively, of an embodiment of the invention which provides studs all around the valve;

Fig. 9 is a plan view of the sole from the insole side and shows the way the valves are arranged according to

the embodiment of Figs. 5 and 6.

With reference to the figures, the functioning of the check valve for the discharge of inside air can be referred to that of ordinary rubber or latex valves, for example, used in catheter and comprising a membrane with reduced thickness provided with an upward pointing concavity which closes a tubular conduit connected to an inflatable bladder. After piercing the membrane and blowing air therein, the bladder will inflate and remain swollen as the pressure acting on the membrane itself will close the microhole through which air had passed just thanks to the concavity of the membrane.

Turning now to Fig. 2, it is shown therein a partial section of a sole provided with a discharge valve according to a first embodiment of the invention.

As it can be seen, the valve encircled by an oval frame for a better illustration is made during one moulding step in one piece with sole 2 and essentially includes a membrane 4 with reduced thickness which limits a concave zone 1 at the upper side. Such a zone has preferably, but not necessarily, a circular plan.

Even the lower surface of the membrane, indicated at 5, is slightly curved with the concavity directed upwards. Such a surface is the ceiling of a hollow space, cell or chamber 9 which communicates with road surface 8 through orifice 6.

Such orifice can be more or less wide (compare the reduced dimension of the orifice of Fig. 2 with that

of the orifice of Fig. 3, where chamber 9 is fully open towards tread 8).

According to the present invention a through microhole 14 is pierced inside membrane 4. Such a microhole is preferably pierced at its centre and has such a dimension as to be only open when the pressure on the tread side is lower than the inside pressure. The operation is schematically illustrated in Fig. 1.

During walking, as with an increase in the user's weight the concavity of the membrane concurrently increases opening the holes, in contrast to that there does occur a pressure increase inside chambers 9' over the area of maximum contact with the ground, which will cause membrane 4 to be compressed from below and consequently the holes of all of the corresponding valves to be closed. As it can be seen from the figure, chambers 9 of the other valves not lying along the vertical weight pressure vector are decompressed, thus causing the air inside the shoe to easily escape.

Figures 3 to 6 show a number of valves different from one another in terms of the shape of chamber 9 (Figs. 2, 3, 4) and/or for the presence of a curved lip 10 projecting along the periphery of upper concavity 1 (Figs. 5 and 6). Such lip defines a dome-shaped chamber 12 or an igloo which communicates with the outside through a central hole 11 at its top. Since such a dome or igloo 12 directly contacts the fixed insole during the dynamics of walking, it acts as a pump just thanks to its deformation and following resilient return that causes air inside the shoe to be

forcibly expelled through the hole in the underlying membrane operating as a check valve during walking and with repeated cycles of loading onto and unloading from the sole of the user's weight. In addition, such a dome or igloo exerts a real massaging action on the foot.

Figs. 7 and 8 show another embodiment of the invention which provides studs 7 distributed all around hole 6 of chamber 9. Such studs have the function of breaking the liquid film on the road after a shower avoiding the aquaplaning effects.

Fig. 9 shows a typical distribution of the valves in three significant areas of the sole. The illustrated embodiment is that of Figs. 5 and 6 with a circular lip 10 and a central hole 11.

It is self-evident that the embodiment of Figs. 5 and 6, i.e. that with igloos, the distribution of the igloos on the upper surface of the sole should be such as to ensure an even bearing of the fixed insole which should not be affected, of course, by the presence of uncomfortable relief on the ground. On the other hand, it is not necessary that a check valve corresponds to each igloo. Their number can be limited with regard to that of igloos so as to be only provided in the most suitable spots.

It is evident that as an alternative to the valves made in one piece and one moulding step along with the sole, as described so far, the use of valves inserted in the sole may be provided. Particularly such valves can be made with materials having a specific weight

different from that of the sole so as to combine their resilient features with those of the sole in the best possible way in order to reach the desired objectives. It should be taken into consideration, for example, the case of a leather sole.

These and other changes which can be made by those skilled in the art are to be considered in the scope of the present invention as defined in the appended claims.

Claims

1. A shoe sole characterized in that in the width of the sole there are provided a plurality of check valves for discharging the air contained in the inside of the shoe which are made of a resilient material and each provided with a microhole connecting the inside
5 of the shoe with the outside, such valves being formed of a membrane provided with a concavity which is directed towards the fixed insole and beneath which a hollow space or chamber is formed which communicates
10 through its lower side with the outside reaching the tread.

2. The shoe sole of claim 1, characterized in that the microhole of each valve is pierced at the centre of
15 its concavity.

3. The shoe sole of the preceding claims, characterized in that said concave membrane has a circular plan.
20

4. The shoe sole of the preceding claims, characterized in that even the lower surface of the membrane is slightly curved with an upwards directed concavity, i.e. in the direction of the perforated
25 fixed insole, and forms the ceiling of the underlying chamber.

5. The shoe sole of the preceding claims, characterized in that the membrane has a thickness which is essentially smaller than the thickness of the sole.

5
6. The shoe sole of the preceding claims, characterized in that during walking when the pressure in the outer chamber exceeds the pressure inside the membrane, the hole in the concave membrane closes and makes the shoe impermeable.

10
7. The shoe sole of the preceding claims, characterized in that the inside air escapes until the inside pressure is compensated by the pressure in the outer chamber.

15
8. The shoe sole of the preceding claims, characterized in that the check valves are made in one piece with the sole and in one moulding step.

20
9. The shoe sole of the preceding claims, characterized in that the microhole in the membrane of the valve is obtained mechanically during a step following the sole moulding step by piercing the membrane by means of needles or stings.

25
10. The shoe sole of the preceding claims, characterized in that as an alternative to the moulded check valves the use of inserted check valves of resilient material is provided.

11. The shoe sole of claim 10, characterized in that the membrane and the chamber in said inserted check valves are made in one piece inside the body of a tubular valve.

12. The shoe sole of claim 10, characterized in that said check valves are made of materials having a different specific weight than that of the sole.

13. The shoe sole of the preceding claims, characterized in that the check valves of resilient material are inserted into a leather sole.

14. The shoe sole of the preceding claims, characterized in that the sole has one or more built-in parts of material with different specific weight in which the check valves of resilient material are inserted.

15. The shoe sole of the preceding claims, characterized in that the chambers have tapered walls so as to facilitate the expulsion of debris.

16. The shoe sole of the preceding claims, characterized in that there is provided a curved lip projecting along the periphery of the upper concavity of the membrane and forming a chamber shaped as a dome or igloo which communicates with the inside of the shoe through a central hole at its top.

17. The shoe sole of claim 16, characterized in that said central hole is aligned with the microhole in the concave membrane.

5

18. The shoe sole of claims 16 and 17, characterized in that said domes or igloos have the double function of massaging the foot and acting as pumps which cause the inner air to be forcibly expelled.

10

19. The shoe sole of the preceding claims, characterized in that spacing studs avoiding the aquaplaning effects are provided on the tread all around the hole in the chamber.

15

20. The shoe sole of the preceding claims, characterized in that the valves are distributed over the whole sole or only on some of its areas such as those corresponding to toes, arch and heel.

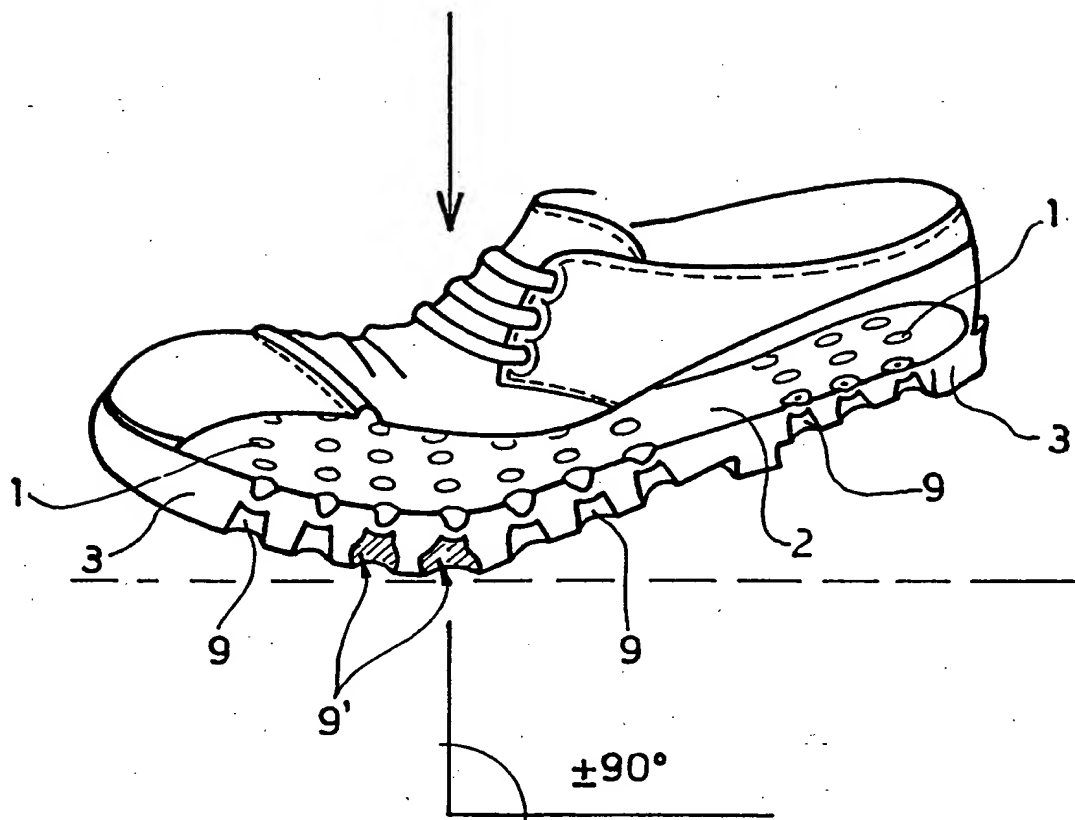


FIG. 1

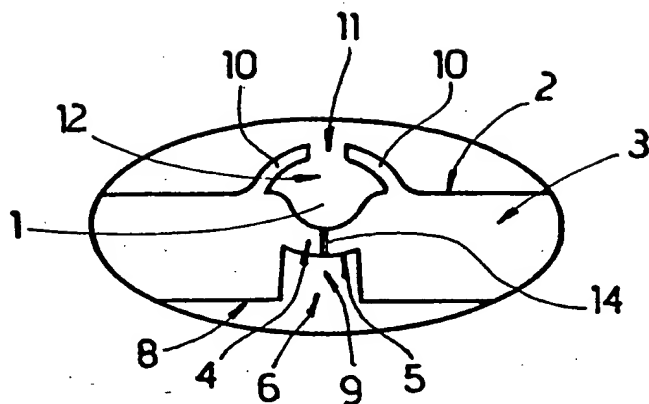


FIG. 5

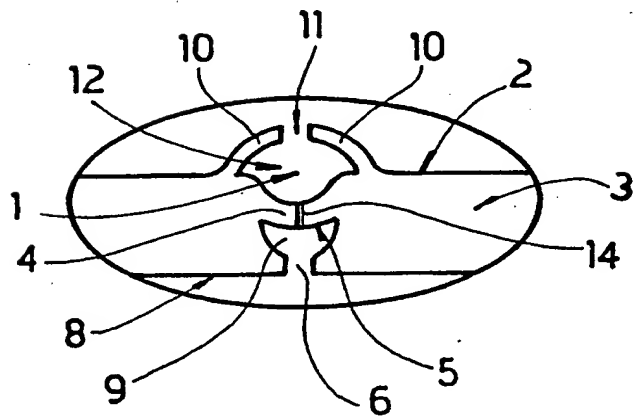


FIG. 6

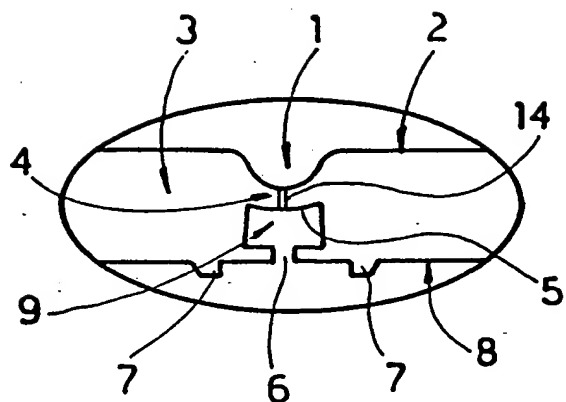


FIG. 2

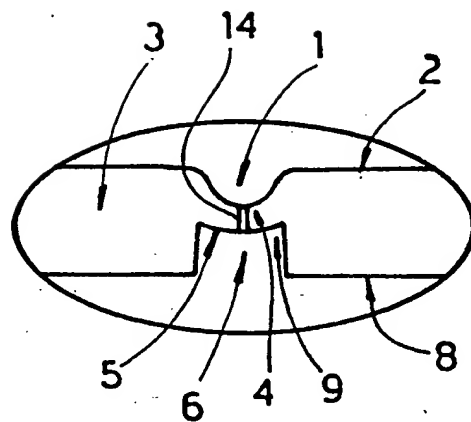


FIG. 3

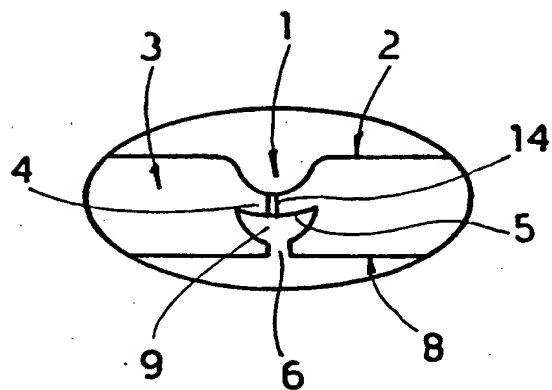


FIG. 4

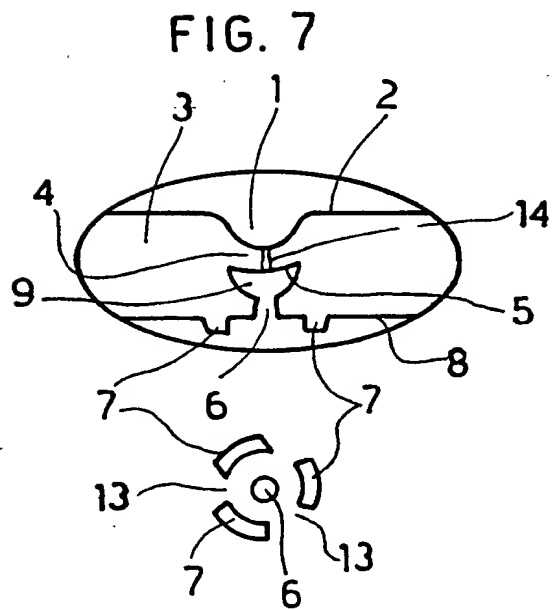


FIG. 8

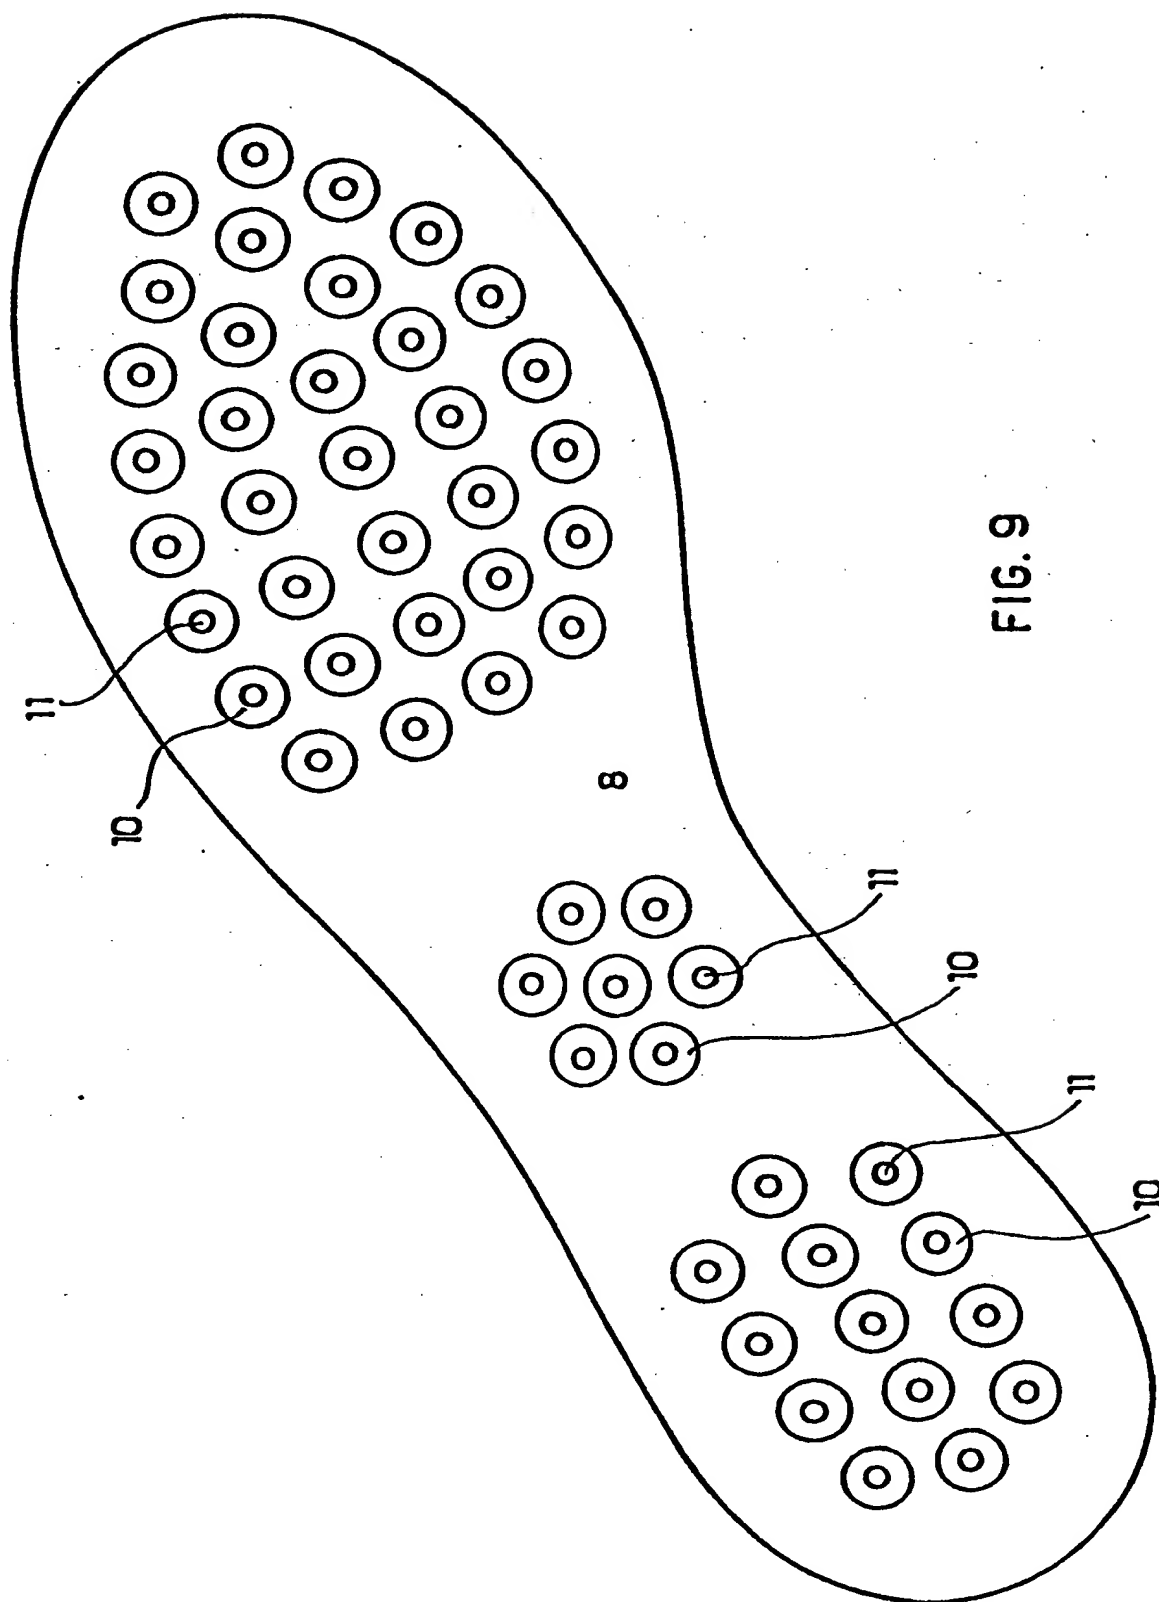


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 98/00090

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A43B7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A43B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 103 061 A (OHASHI KAZUO) 21 March 1984 see the whole document	1
A	US 3 061 950 A (B. LEVINE) 6 November 1962 see the whole document	1
A	US 4 290 211 A (G. CSENGERI) 22 September 1981 see the whole document	1
A	EP 0 382 904 A (POL SCARPE SPORTIVE) 22 August 1990 cited in the application see the whole document	1
A	FR 2 495 447 A (E. VIGNERON) 11 June 1982 see the whole document	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

6 August 1998

Date of mailing of the international search report

14/08/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Declerck, J

PCT/IT 98/00090.

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/IT 98/00090

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0103061	A	21-03-1984	JP 1331730 C	14-08-1986
			JP 59077801 A	04-05-1984
			JP 60058841 B	21-12-1985
			AU 560435 B	09-04-1987
			AU 1022683 A	11-09-1986
			CA 1193435 A	17-09-1985
			US 4507880 A	02-04-1985
US 3061950	A	06-11-1962	NONE	
US 4290211	A	22-09-1981	NONE	
EP 0382904	A	22-08-1990	AT 105678 T	15-06-1994
			DE 68915427 D	23-06-1994
			DE 68915427 T	01-09-1994
			ES 2051966 T	01-07-1994
			HK 148994 A	06-01-1995
			US 5044096 A	03-09-1991
FR 2495447	A	11-06-1982	NONE	
GB 2290016	A	13-12-1995	NONE	
US 5588226	A	31-12-1996	BR 9500679 A	01-08-1995

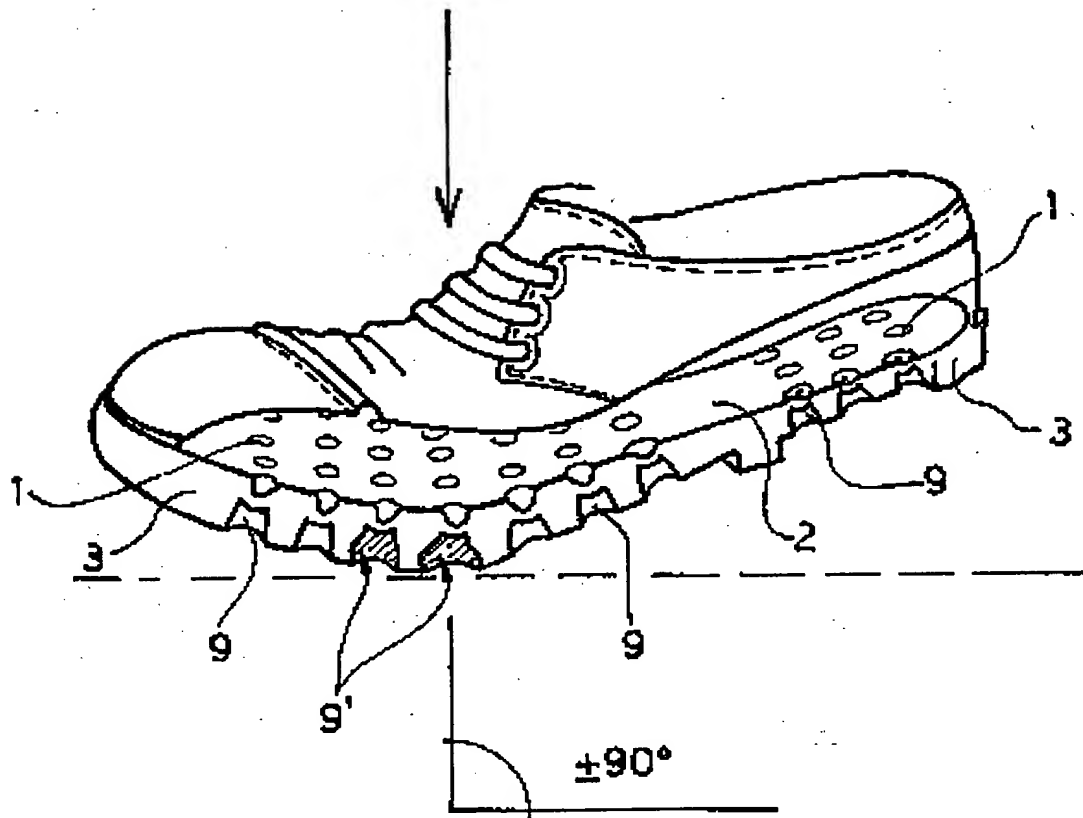


FIG. 1

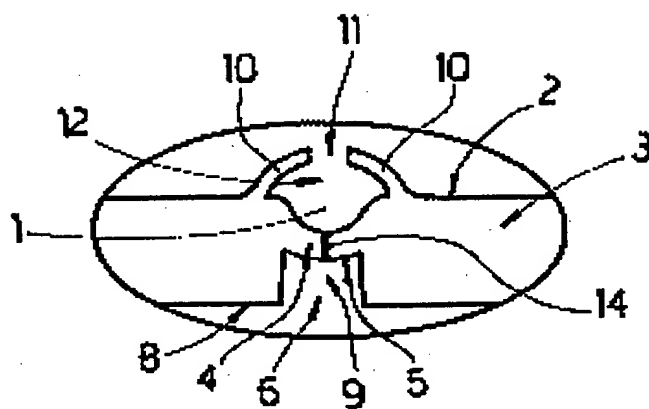


FIG. 5

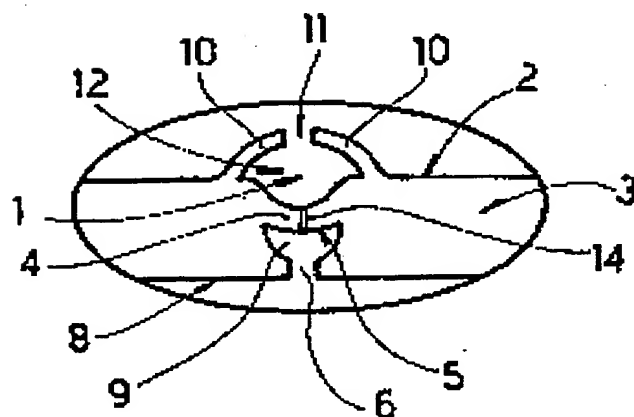


FIG. 6

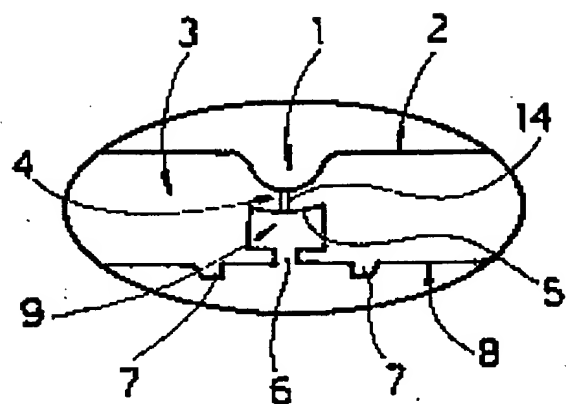


FIG. 2

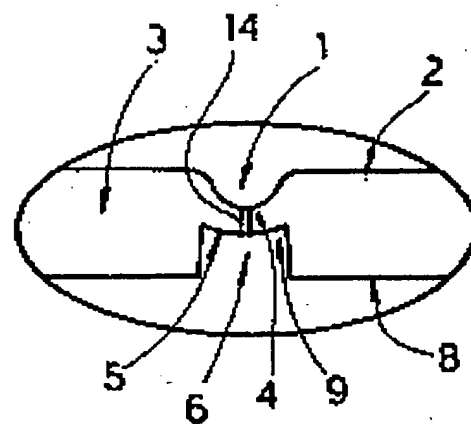


FIG. 3

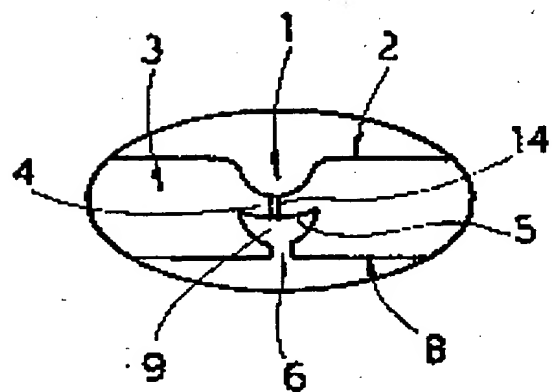


FIG. 4

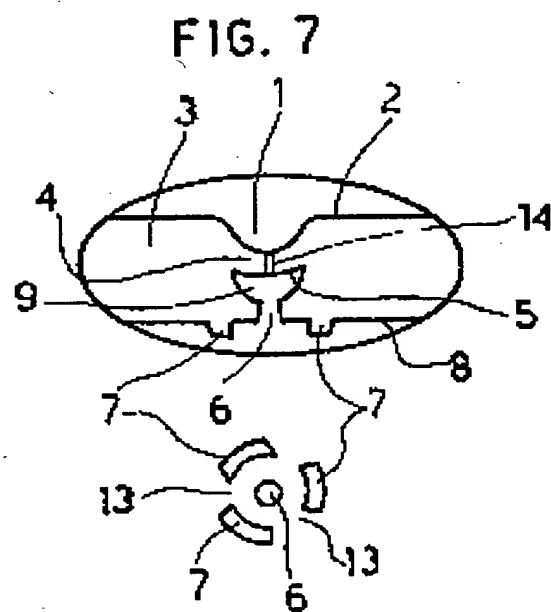


FIG. 8

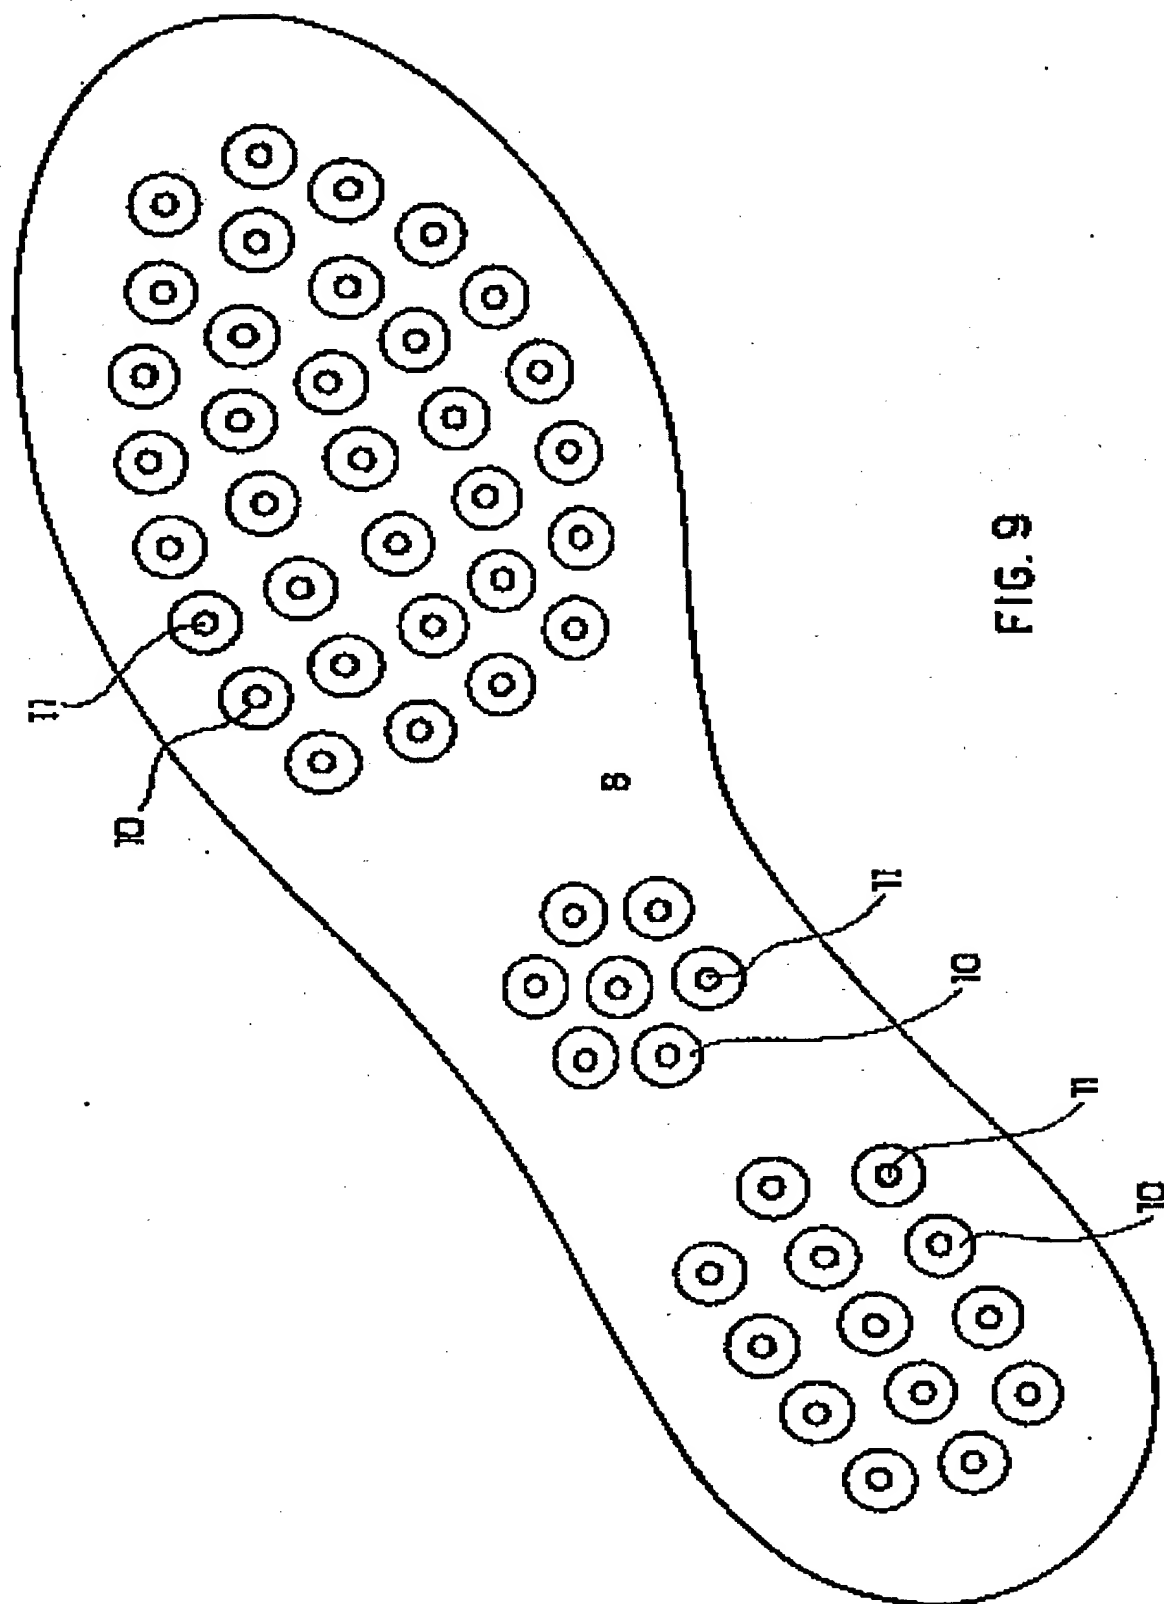


FIG. 9